




DATASHEET
TR-NS1206-65-4PoE

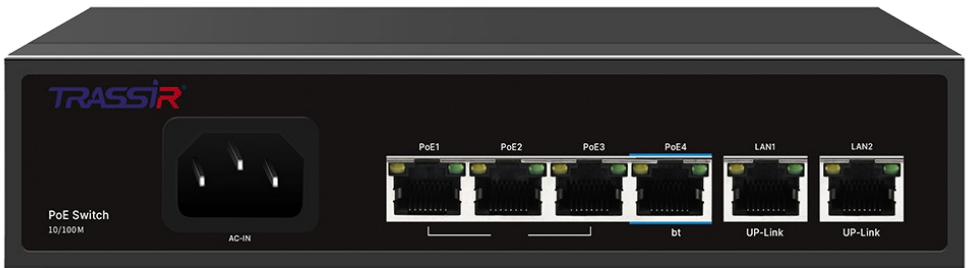

TR-NS1206-65-4PoE is an unmanaged switch with 4 x 10/100 Mbps PoE ports with the ability to power up the connected devices through twisted pair.

Basic equipment:

- Switch 1pcs.
- Power cord with adapter 1pcs.
- User Manual 1pcs.
- Device datasheet 1pcs.

Specification:

Model	TR-NS1206-65-4PoE	
Ethernet ports	4 x 10/100 Mbps (Base-TX) 2 x 10/100 Mbps (Uplink, Base-TX)	
PoE Standards	IEEE802.3af/at/bt	
Maximum capacity per port	Total: 65W Ports 1-3: up to 30W	Ports 4: up to 60W
Power pinout via PoE	DC+: 1/2 DC-: 3/6	
Switching capacity	1.2 Gbps	
Transmission speed	0.89 Mpps	
Buffer size	1 MB	
MAC addresses table size	2000	
Stream management	By selection	
Function	Autoadaptation	
PD Alive¹	Supported. The port restarts 270 seconds after device connection loss.	
Power consumption	100-240V AC power adapter	
Lightning protection	Standard mode 6kV Differential mode 4kV	
Electrostatic discharge protection	Air discharge 10kV Contact discharge 8kV	
Maximum power capacity	65W	
Working temperature	-30°C...60°C	
Permissible humidity level	10 – 90%	
Weight, kg	0.860	
Dimensions (WxDxH), mm	189.5 x 139.5 x 42	

¹ For more details, see the user manual for the device.

Warranty service:

- Three - year warranty service from the date of sale.
- In case of the warranty card absence, the warranty period is determined from the date of sale.

DATE OF SALE

SERIAL NUMBER

www.helpdesk.trassir.com
[mail: helpdesk@trassir.com](mailto:helpdesk@trassir.com)