




DATASHEET

TRASSIR TR-NS1126-225-24PoE

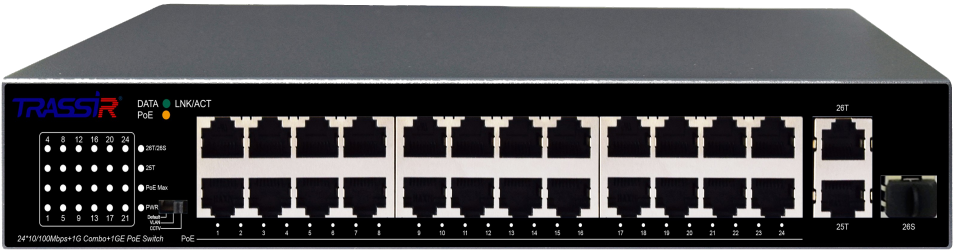

TR-NS1126-225-24PoE is an unmanaged switch with 24 10/100 Mbps PoE ports with the ability to power up the connected devices power twisted pair.

Basic equipment:

- Switch 1pcs.
- Power cable 1pcs.
- Rack mounting kit..... 1pcs.
- Datasheet 1pcs.

Specification:

Model	TR-NS1126-225-24PoE
Ethernet ports	24*10/100 Mbps 1 Combo * 10/100/1000 Mbps 1* 10/100/1000 Mbps RJ45 port
PoE protocols	32W General: 225 W
Maximum capacity per port	EEE802.3af/at
Power pinout via PoE	DC+: 1/2 DC-: 3/6
Switching capacity	8.8 Gbps
Transmission speed	6.5 M pps
Buffer size	4 Mb
MAC addresses table sizes	16000
Stream management	Enabled by default
Function	VLAN CCTV
PD Alive¹	Supported. The port restarts 180 seconds after device connection loss
Permissible humidity level	5 – 95 %
Power Input	AC: 200~240V 50/60Hz
Lightning protection	Standard mode 4 kV Differential mode 6 kV
Electrostatic discharge protection	Air discharge 8kV Contact discharge 6kV
Power consumption	240 W (PoE:225 W + Switch:15 W)
Working temperature	0°C...40°C
Weight, kg	2.04
Dimensions (W xD x H), mm	280 x 180 x 44

¹ For more details, see the user manual for the device.

Warranty service:

- Three - year warranty service from the date of sale.
- In case the warranty card absence, the warranty period is determined from the date of sale.
You can check the detailed description of the device settings in user guidelines on our web site www.trassir.com.

DATE OF SALE

DEVICE SERIAL NUMBER