


DS-TPE1XX Series Entrance & Exit Control Terminal

DS-TPE1XX, with the Win10 operating system, is a fan-free, low-consumption, but high-performance embedded control terminal in entrance and exit. Designed with flame retardant material, it possesses the features of high-leakproofness and high heat dispersion. It is suitable for situations with high pollution or dustiness.

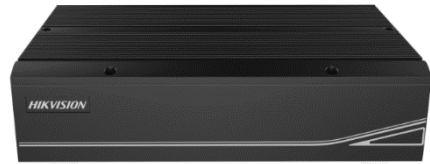

**: Product picture here is only for reference.*

Key Feature

- Fan-free design, but possesses a good cooling effect with the fine aluminum alloy inner structure
- Supports dual 1000 Mbps network card
- Supports standard RS-232 interface
- Built-in 3.5" surveillance-level hard disk, supporting large-capacity image and video storage
- Equipped with 3.5 mm standard audio interface, and HDMI/VGA interfaces

Available Model

- DS-TPE100
- DS-TPE104, with PMS software


**: It is optional to select HDD with different capacities (1T/2T/4T) for each model.*




Specification

Model	DS-TPE1XX
Processor	
Processor	Apollo Lake Platform Processor
Basic frequency	1.5 GHz
Memory	4 GB
Hard disk	1 x 3.5" Surveillance-Level Hard Disk (Optional Capacity: 1T/2T/4T)
Indicator	4 Indicators (1 x System Indicator, 1 x Hard Disk Status Indicator, 1 x Power Indicator, 1 x Alarm Indicator)
Audio and Video	
Audio input	1-ch Audio Input (MIC IN)
Audio output	1-ch Audio Output (AUDIO OUT)
Video output	1 x HDMI, 1 x VGA
Alarm	
Alarm input	4-ch Alarm Input (ALARM IN), Voltage Range: 0 V to 60 V
Alarm output	4-ch Alarm Output (ALARM OUT), Voltage Range: 0 V to 60 V
Interface	
RS-232	2 x RS-232 Interface
RS-485	2 x RS-485 Interface
USB	4 x USB 3.0 Interface
Network	5 x 100 Mbps/1000 Mbps Self-Adaptive Interface, supporting connecting with switch 1 x Independent 100 Mbps/1000 Mbps Self-Adaptive Interface, supporting network isolation
General	
Power supply	12 VDC/5 A
Power consumption	Max.: 50 W Average: 25 W
Working temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Working humidity	10 % to 95% (No Condensation)
Material	Black Aluminum Material
Dimension	245 mm x 65 mm x 170 mm (9.65" x 2.56" x 6.69")

Dimension

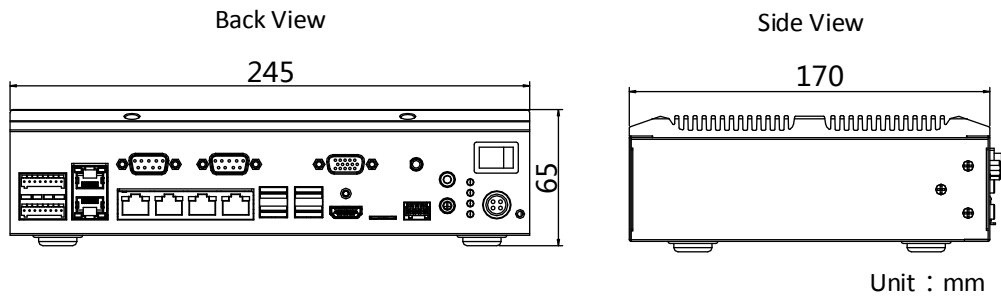

Interface

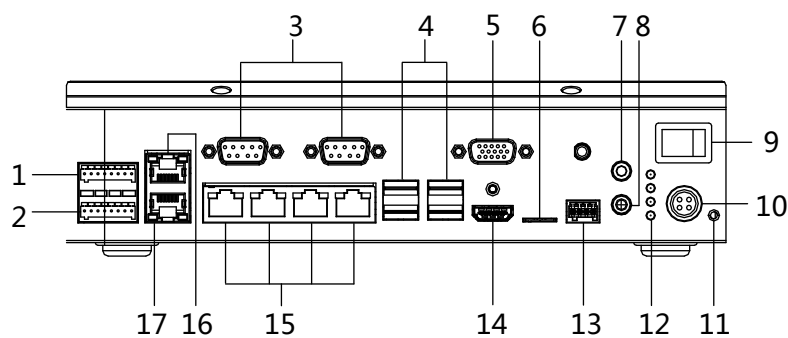


No.	Name	No.	Name
1	Alarm Output	10	Power Interface
2	Alarm Input	11	GND Interface
3	RS-232 Interface	12	Indicators
4	USB 3.0 Interface	13	RS-485 Interface
5	VGA Interface	14	HDMI Interface
6	Reserved Interface	15	Network Interface
7	Audio Output	16	Network Interface
8	Audio Input	17	Network Interface
9	Power Switch		

**: Network interfaces in No. 15 is used to connect downstream devices, like card reader, entrance & exit LPR camera, and so on.*

**: Network interface in No. 16 is used to connect downstream devices, like card reader, entrance & exit LPR camera, and so on.*

**: Network interface in No. 17 is used to connect upstream platform, like server, cloud platform, and so on.*

Typical Application

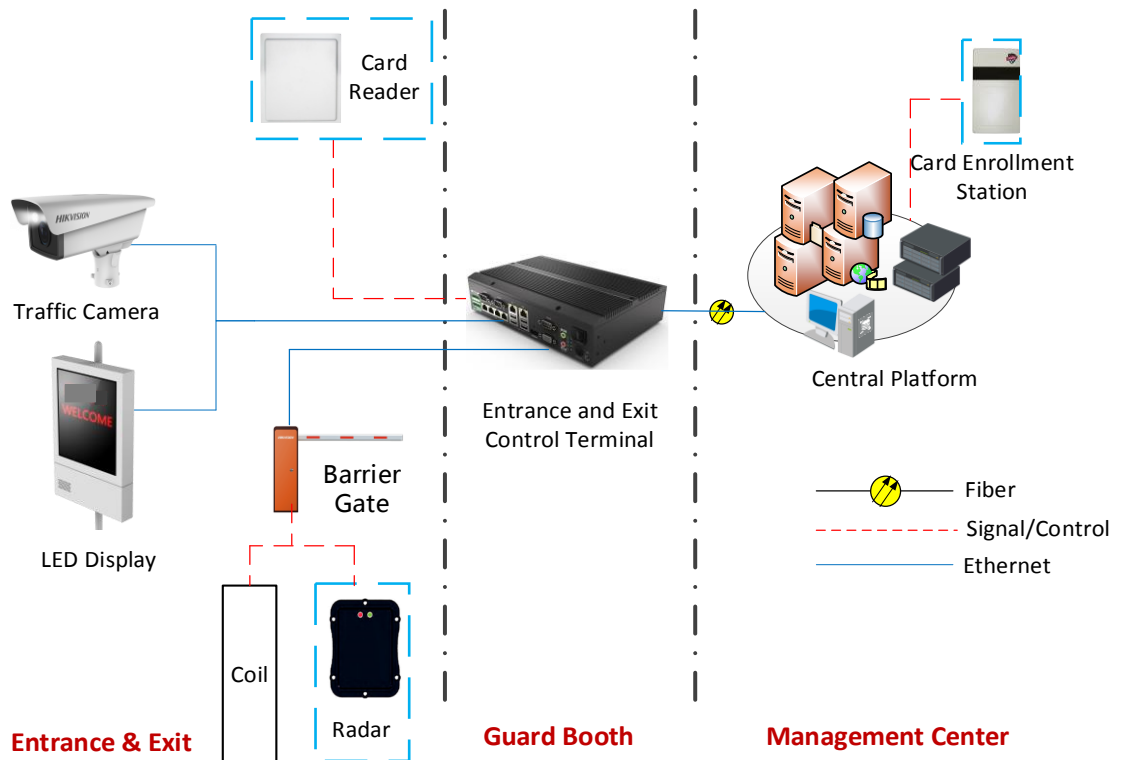

Distributed by

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com